

8 7 6 5 4 3 1

NOTES:

1. DIMENSIONING, TOLERANCING, AND CONTROL SYMBOLS PER ANSI Y14.5M.
2.  A MINIMUM OF 2 COMPLETE LINKS SHALL BE ABOVE THE TOP OF THE ANCHOR.
3. THE CONCRETE USED TO MANUFACTURE THE ANCHOR SHALL HAVE A MINIMUM COMPRESSION STRENGTH OF 2500 PSI AND SHALL BE FIBER REINFORCED.

DWG NO. 0207711		SH 1	
REVISION HISTORY			
ZONE	LTR	DESCRIPTION	DATE
-		INITIAL RELEASE	
1		ADDED WELD CALLOUT	
2		ADDED NOTE 3 JA 7-3-03	

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE COGNIZANT DESIGN ACTIVITY.

Do not distribute to DTIC or other data depositories.


Distribution Statement D: Distribution authorized to DoD & U.S. DoD contractors only; Administrative or Operational Use; [95/10/23]. Other requests shall be referred to Commanding Officer, Space and Naval Warfare Systems Center, San Diego, San Diego CA 92152-5001

Note: Distribution to potential U.S. DoD contractors for the purpose of soliciting bids is authorized.






SEE SEPARATE PARTS LIST

INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-103 ASSE Y14.5M-94		SPAWAR SYSTEMS CENTER, SAN DIEGO, SAN DIEGO, CA 92152-5001	
DO NOT SCALE THIS DRAWING		ANCHOR, REPLICA, TARGET, MK 50, MOD 0	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. BREAK ALL EDGES .015 MAX. REMOVE ALL BURRS. TOLERANCES ARE: .XX ± .03 .XXX ± .010		PROD MGR	CONTR MGR
ANGLES ±0°30'		DESIGN	CHECKED
FILLETS MAX. SURFACE ROUGHNESS		PREPARED K. KRUEGER	PROJECT NUMBER
RELEASED DATE		APPROVED FOR	SIZE D
2 2 REVISION	REVISION STATUS OF SHEETS	APPLICATION	CAGE CODE 55910
2 1 SHEET			DRAWING NUMBER 0207711
			SCALE 1/1
			DRAWING NUMBER 0207711
			REVISION 2
			BY DIRECTION
			SHEET 1 OF 2

DWG NO. 0207711		SH 2	1	
REVISION HISTORY				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
-		INITIAL RELEASE		
2		FN 2 WAS 2 PIECES JA 7-3-03		

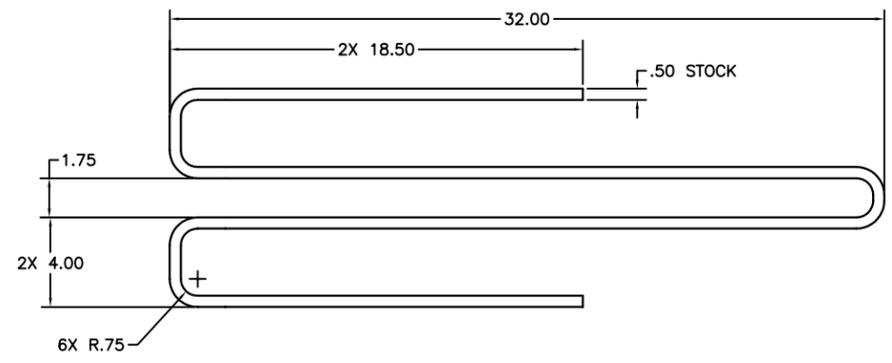

FN 2

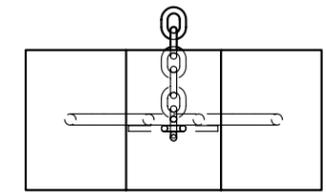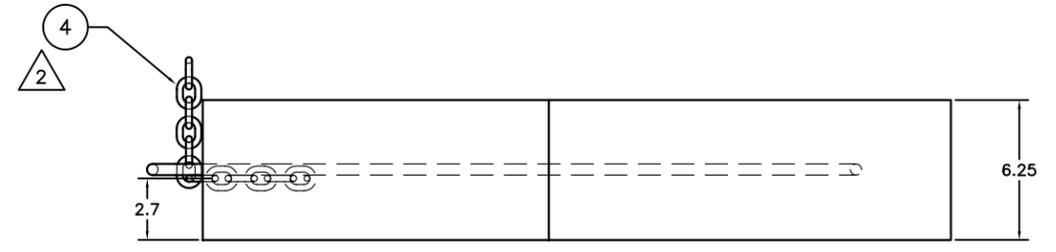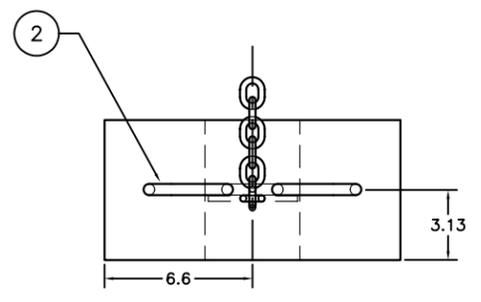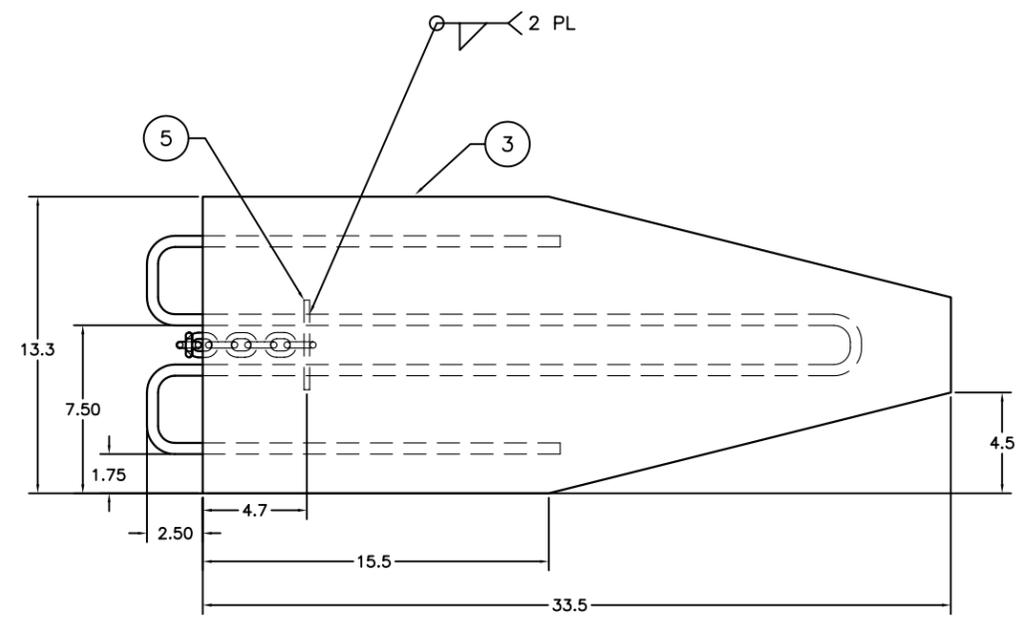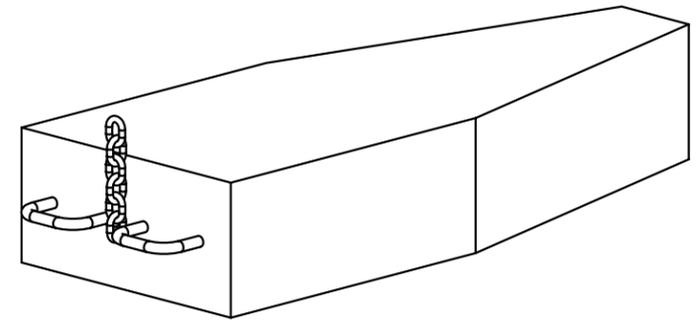

-1

SIZE	CAGE CODE	DRAWING NUMBER	REV
D	55910	0207711	2
SCALE	1/4	SHEET	2

